

# Elegant Window Profile System

deceuninck




$U_f$  up to  
0,93  
W/m<sup>2</sup>K

Windows and Doors


*Elegant is a new generation of window profiling systems. Exceptional functional parameters, combined with modern and elegant designs, break new ground in the PVC window market. Elegant's impressive, sleek and expressive shape meets maximum requirements in terms of size, thermal and acoustic insulation and burglary protection. Elegant is a unique design without compromise..*

[www.elegant.deceuninck.com](http://www.elegant.deceuninck.com)


# Elegant

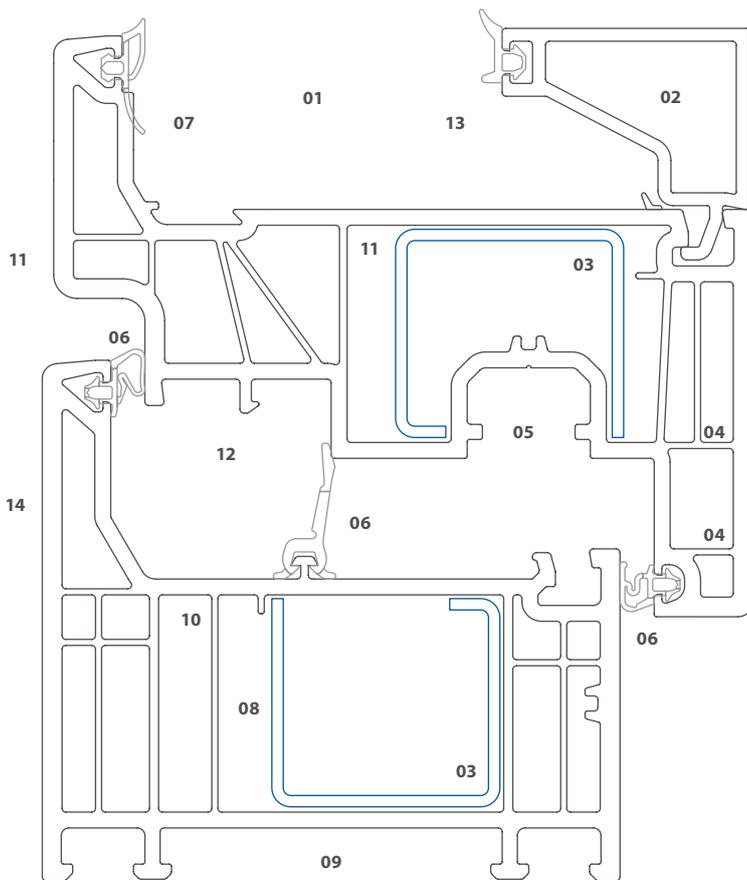

Elegant flush profile  
Scale 1: 1

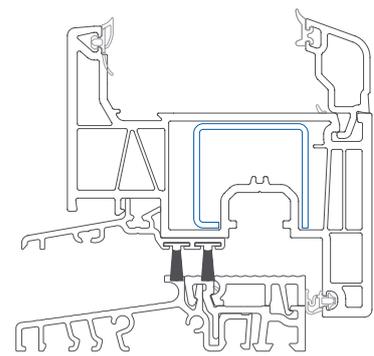

Elegant's warm aluminium threshold with  
curved slat - Scale 1: 2

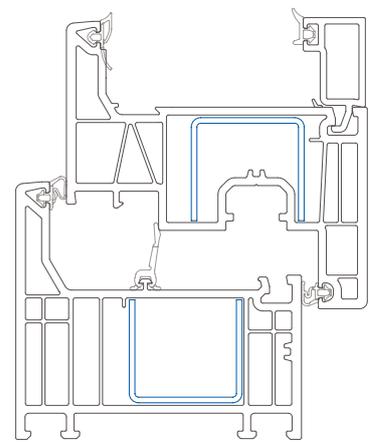

Elegant non-flush profile - Scale 1: 2

- 01 Glazing, up to 70 mm:**  
the possibility of using special, very thick glass packages characterised by the highest thermal and acoustic parameters
- 02 One-unit glazing bead:** easy assembly; rectangular, strip shape facilitating the fixing of internal blinds
- 03 Rigid, matching reinforcements:** stable, universal reinforcements and a rectangular chamber finish, for increasing the stability of the profiles
- 04 Fittings:** the option of using fittings equipped with standard surface hinges as well as concealed hinges
- 05 13 mm fitting groove:** special anti-burglary fittings can be installed
- 06 Three circumferential gaskets:** maximum parameters of thermal insulation / air permeability as well as being rain-proof.
- 07 20 mm glazing depth:** optimal thermal insulation /prevention of condensation
- 08 6-chamber technology:** excellent thermal insulation /  $U_f$  value up to  $0.93 \text{ W/m}^2\text{K}$
- 09 76 mm installation depth:** ideal for use in new and refurbished buildings
- 10 Ecology:**  
the use of recycled materials in the frame and wing  
- EcoPowerCore technology (EPC)
- 11 Sleek, rebate edges, clearly marked where sharp.**  
**Fluted effect:** modern design with the appearance of aluminium
- 12 Drip:** integrated fastening of the movable post profile
- 13 The technology for affixing the glazing:**  
the possibility of applying different ways of affixing the glazing with adhesives, either on the edge of the glass or from the side of the shaft edge; the possibility, also, to affix on the tape, enabling the production of elements of up to 2.60 m in height
- 14 Large selection of surface finishes: the veneers available are:** smooth, woody, matt and metallic, optionally with aluminium covers
- 15 Harmonious façade finish:** various products available for the Elegant system, such as HST lift and slide door, façade system, PROtex 2.0 roller blind system



Recycling Idea · Inoutic / Deceuninck is the initiator of the Rewindo GmbH association, which promotes the idea of recycling plastic windows subject to utilisation.

TRADE PARTNER



Building a sustainable home

Inoutic / Deceuninck Sp. z o.o.

Jasin, ul. Poznańska 34, 62-020 Swarzędz

T: 48 61 818 70 00, F: 48 61 818 70 01

deceuninck.polska@deceuninck.com · [www.deceuninck.pl](http://www.deceuninck.pl)